


RF51443,WHT,TPV,3X18

Washdown Cable – Reelfast™ Bulk Cable



Features

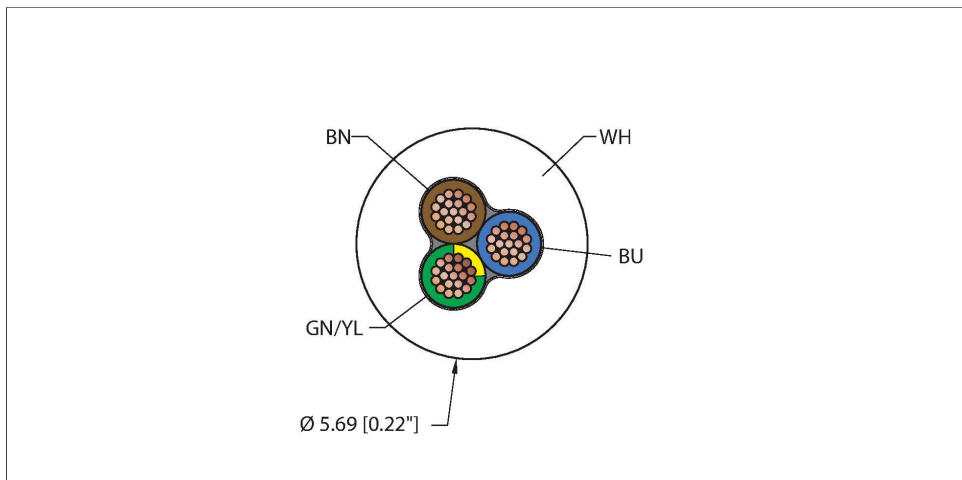

- 600V
- Washdown Cable
- White TPV jacket, 3X18 AWG
- -40 Cold Bend Rating

Technical data

Type	RF51443,WHT,TPV,3X18
Ident. no.	100012602
Cable data	
Cable platform	Washdown Cable
Total number of conductors	3
Cable diameter	Ø 5.69 mm
Cable jacket	TPV, White
Conductor diameter	0.066 "
Conductor material	TC (tinned copper)
Conductor insulation material	TPC-ET
Conductor size	3 x 18 AWG [Similar to 0.75 mm ²]
Number of strands x O.D.	19 x 0.0092 "
Conductor colors	BN, BU, GN/YL
Weight	0.105 lbs./meter
Electrical properties at +20 °C	
Voltage	600V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	7.22 Ω/1000ft max.
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø
Cold bend rating	-40 °C
Temperature range (static)	-40 °C...+105 °C

Technical data

Temperature range (dynamic)	-40 °C...+105 °C
Temperature range (installation)	-20 °C...+105 °C
Approval	
Compliances	RoHS
Note	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.