
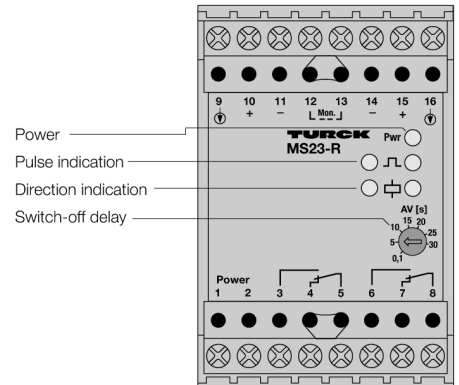


# Rotation direction discriminator 1-channel MS23-R

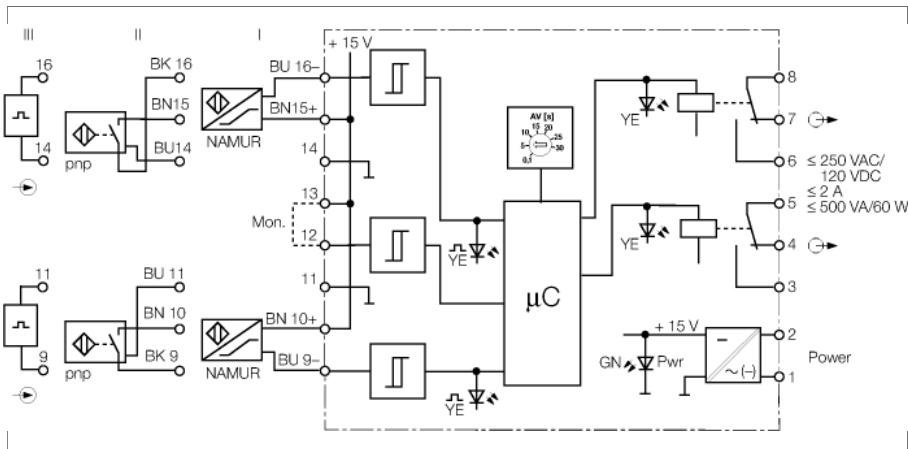

The MS23-R is controlled via two 3-wire pnp sensors, sensors acc. to EN 60947-5-6 (I) or signal sources with pulse levels of 10...30 VDC.

The device indicates the moving direction of the rotating parts. The direction of rotation is deduced from the damping sequence and the overlap of two sensor signals. The damping element has to be selected such that both sensors are attenuated simultaneously for 1ms. For more technical information please refer to the general information about rotation speed monitors/motion controls and the instruction manual provided with the device.

Depending on the direction of rotation, one output relay with changeover contact is energized for clockwise and one for counter-clockwise rotation. A yellow LED indicates the switching status of the corresponding output relay. The green LED indicates operational readiness. Input pulses are indicated by the related yellow LED.

Due to the open bridge at the terminals 12/13 the switch-off delay is active. With the adjustable switch-off delay the time lag between the input pulses can be monitored according to *underspeed*.

For this purpose a switch-off delay between 0.1...30 s has to be programmed at the potentiometer. The relay energized most recently during the switch-off delay remains energized.

Moreover, a switch-off delay can be programmed to filter out short-term peaks or dips.

The switch-off delay is deactivated if the terminals 12/13 are bridged. The relays remain in the corresponding switching state until a counter rotation direction is detected.

The device is **not** suited for safe detection of complete system standstill as may be required in safety applications such as centrifuges.


- **Rotation direction discriminator**
- **Adjustable switch-off delay**
- **Removable terminal blocks**
- **Complete galvanic isolation**

# Rotation direction discriminator


## 1-channel

### MS23-R


#### Dimensions

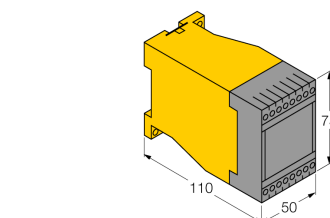

#### Output relay – Load curve

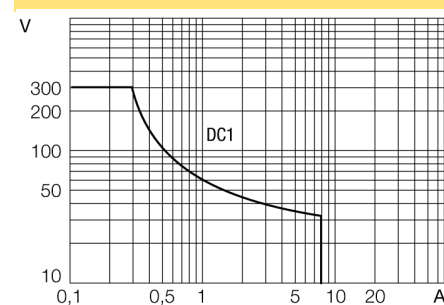

#### Output relay – Electrical lifetime

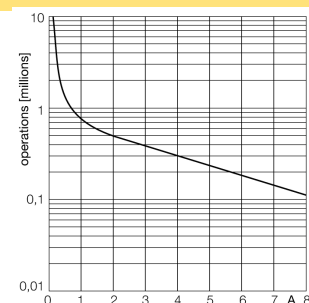

<b>Type code</b>	MS23-R
Ident no.	0508112
<b>Nominal voltage</b>	Universal voltage supply unit
Operating voltage	20...250 VAC
Frequency	40...70 Hz
Operating voltage range	20...250 VDC
Power consumption	≤ 3 W
<b>Max. input frequency</b>	150000 min <sup>-1</sup>
Pulse time	≥ 0.02 ms
Pulse stop	≥ 0.02 ms
NAMUR	EN-60947-5-6
No-load voltage	8.2 VDC
Short-circuit current	8.2 mA
Input resistance	1 kΩ
Cable resistance	≤ 50 Ω
Switch-on threshold	1.55 mA
Switch-off threshold	1.75 mA
3-wire input	
No-load voltage	15 VDC
Current	≤ 15 mA
0-signal	0...3VDC
1-signal	5...30 VDC
External signal source	
0-signal	0-3 VDC
1-signal	5...30 VDC
Input resistance	26000 Ω
<b>Output circuits (digital)</b>	2 x relay (change-over)
Relay switching voltage	≤ 250 VAC/30 VDC
Switching current per output	≤ 2 A
Switching capacity per output	≤ 500 VA/60 W
Switching frequency	≤ 10 Hz
Contact quality	AgNi, 3μ Au
<b>Temperature drift</b>	≤ 0.02 % / K
<b>Galvanic isolation</b>	
Test voltage	2.5 kV
<b>Indication</b>	
Pulse input	yellow
Switching state	yellow
<b>IP Rating</b>	IP20
Ambient temperature	-25 ...+60 °C
Dimensions	75 x 50 x 110 mm
Weight	258 g
Mounting instruction	for DIN rail / panel
Housing material	polycarbonate/ABS
Electrical connection	2 x 8-pin removable terminal blocks, reverse polarity protected, screw connection
Terminal cross-section	1 x 2.5 mm <sup>2</sup> / 2 x 1.5 mm <sup>2</sup>