


**Zero-speed monitor**  
**1-channel**  
**MS27-R**

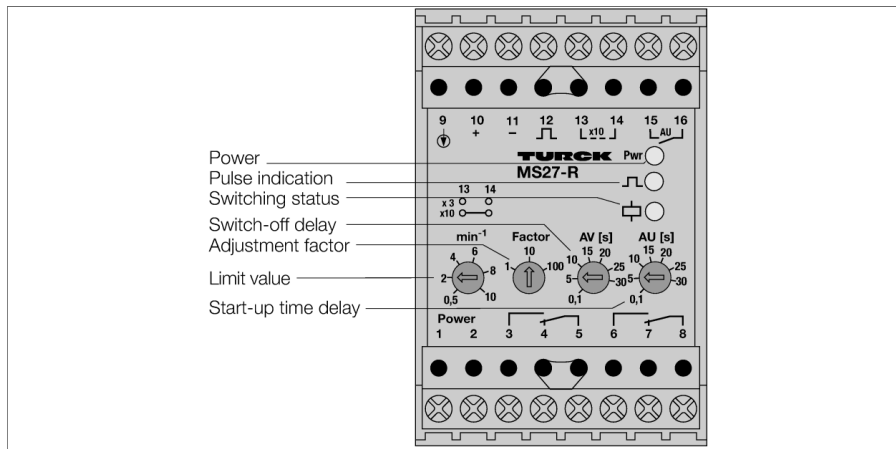

The zero-speed monitor MS27-R is controlled via 3-wire pnp sensors (II), sensors acc. to EN 60947-5-6 (I) or signal sources with pulse levels of 5...30 VDC (III).

Two relay outputs with one changover contact are provided at the output.

The device is hard-coded to *wire-break monitoring*. If the rotation speeds are below the adjusted limit value, the output relays are de-energized. Six overlapping measuring ranges are programmable. First, the measuring range is set with the bridged terminals 13/14 and the "Factor" switch, then the switchpoint is fine adjusted with the potentiometer "min".

Rotation speeds are monitored according to the pulse period measurement principle. This way short response times are achieved even for applications with relatively low speeds.

The green LED indicates operational readiness. The switching status of the output relay is indicated by a yellow LED. Input pulses are indicated by the yellow LED.

A start-up delay between 0.1...30 s for the drive can be set with the AU potentiometer at the front. During this period the limit value relay is energized, preventing this way underspeed indication and system shut-down during the start-up phase. The start-up delay is activated via a potential-free contact at the terminals 15/16 or by applying power to the bridged terminals 15/16.

The device is equipped with an adjustable switch-off delay. The delay time between 0.1...30 s is set with the AV potentiometer at the front. Short-term dips of rotation speed can thus be filtered out.

The device is **not** suited for the detection of an overall system standstill as may be required in safety applications such as centrifuges.

- **Rotation underspeed monitoring**
- **Monitoring range: 25 mHz... 166 Hz (1.5...10 000 min<sup>-1</sup>)**
- **Removable terminal blocks**
- **Start-up bypass, activatable**
- **Adjustable switch-off delay**
- **Two sealed relays with hard gold contact (1 x limit value, 1 x alarm)**
- **Complete galvanic isolation**


# Zero-speed monitor

## 1-channel


### MS27-R

<b>Type code</b>	MS27-R
Ident no.	0508412
<b>Nominal voltage</b>	Universal voltage supply unit
Operating voltage	20...250 VAC
Frequency	40...70 Hz
Operating voltage range	20...250 VDC
Power consumption	≤ 3 W
<b>Monitoring range / setting range:</b>	≤ 1.5...10000 min <sup>-1</sup>
Max. input frequency	150000 min <sup>-1</sup>
Pulse time	≥ 0.02 ms
Pulse stop	≥ 0.02 ms
NAMUR	EN-60947-5-6
No-load voltage	8.2 VDC
Short-circuit current	8.2 mA
Input resistance	1 kΩ
Cable resistance	≤ 50 Ω
Switch-on threshold	1.55 mA
Switch-off threshold	1.75 mA
3-wire input	
No-load voltage	15 VDC
Current	≤ 30 mA
0-signal	0...3VDC
1-signal	5...30 VDC
External signal source	
0-signal	0-3 VDC
1-signal	5...30 VDC
Input resistance	26000 Ω
<b>Output circuits (digital)</b>	2 x relay (change-over)
Relay switching voltage	≤ 250 VAC/30 VDC
Switching current per output	≤ 2 A
Switching capacity per output	≤ 500 VA/60 W
Switching frequency	≤ 10 Hz
Contact quality	AgNi, 3μ Au
Semiconductor output circuit(s)	
Pulse output	
Voltage	≤ 14 V
Current	≤ 10 mA
<b>Temperature drift</b>	≤ 0.02 % / K
<b>Galvanic isolation</b>	
Test voltage	2.5 kV
<b>Indication</b>	
Operational readiness	green
Pulse input	yellow
Switching state	yellow
<b>IP Rating</b>	IP20
Ambient temperature	-25 ...+60 °C
Dimensions	75 x 50 x 110 mm
Weight	246 g
Mounting instruction	for DIN rail / panel
Housing material	polycarbonate/ABS
Electrical connection	2 x 8-pin removable terminal blocks, reverse polarity protected, screw connection
Terminal cross-section	1 x 2.5 mm <sup>2</sup> / 2 x 1.5 mm <sup>2</sup>

#### Dimensions



#### Output relay – Load curve

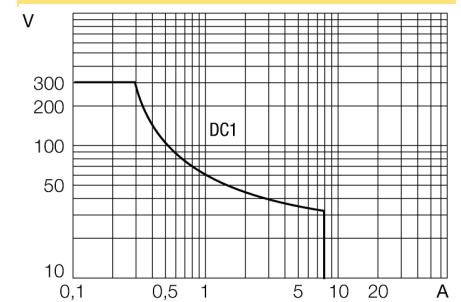

#### Output relay – Electrical lifetime

