


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	NYLON or TPU					
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	4.0 A					
RATED VOLTAGE [V]	250 V					
OUTER CABLE JACKET MATERIAL/COLOR	PVC/VIOLET					
CONDUCTOR INSULATION MATERIAL	POLYETHYLENE					
NUMBER OF CONDUCTORS [AWG]	2x22 AWG (SHIELDED DATA PAIR WITH DRAIN WIRE)					
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)					
PROTECTION CLASS	MEETS IEC IP67					

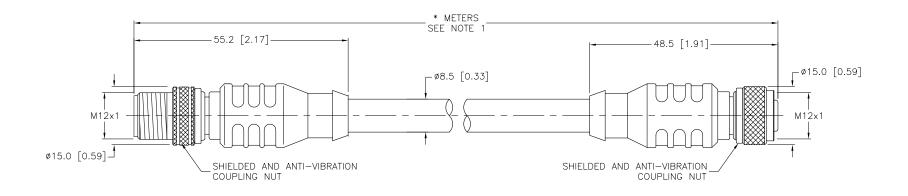

02/15/11

DATE

CABLE LENGTH	TOLERANCE				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				

## NOTES:

DESCRIPTION

UPDATE PROTECTION CLASS

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

	RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	Sensors and Automation Controls	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
FIC	MATERIAL	DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT CBM	DATE 05/17/00	DESCRIPTION RSSW RKSW	455 *M	
			DSGN	SCALE 1=1.0	MCAN MCCN	455-*W	
			UNIT OF MEASUREMENT		IDENTIFICATION NO. REV		
			LAULINAETED [ INIGIL ]		IDENTIFICATION NO.		I KEY
		CONTACT TURCK	MILLIMETE	ER [INCH]			l F
34226		FOR MORE INFORMATION					
ECO NO.			DO NOT SCALE	THIS DRAWING	FILE: 777005681	SHEE	T 1 OF 1
•							•

## SOURCE DRAWING - FOR REFERENCE ONLY