


FEMALE END VIEW

1
2
3
4
5

enviro
fast.



WIRING DIAGRAM

J1	J2
1	1
2	2
3	3
4	4
5	5

J1

J2

Diagram illustrating a mapping from the left set to the right set:

- Line 1: 1 on the left, 1 on the right
- Line 2: 2 on the left, 2 on the right
- Line 3: 3 on the left, 3 on the right
- Line 4: 4 on the left, 4 on the right
- Line 5: 5 on the left, 5 on the right

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	5x20 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

TPU

TPU/YELLOW

BRASS/GOLD

BRASS/NICKEL

4.0 A


250 V

	PVC
--	-----


5x20 AWG

-40°C to +105°C (-40°F to +221°F)

NEMA 1,3,4,6P AND IEC IP68, IP69K

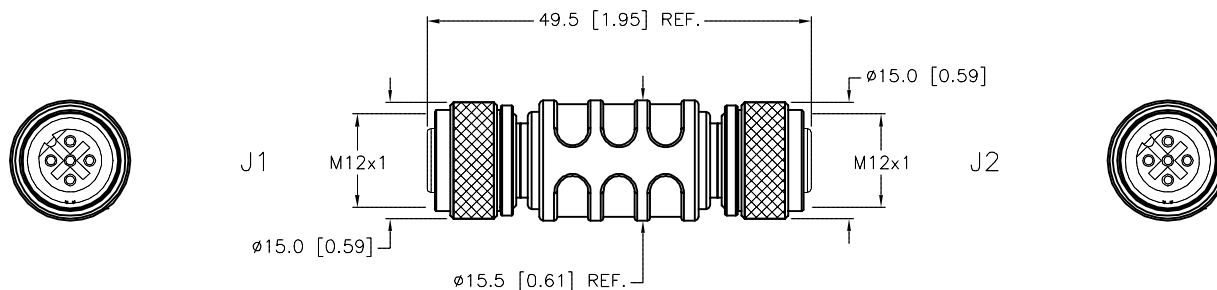

SOURCE DRAWING – FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	08/10/10	DESCRIPTION RKC RKC 4.5		
SEE SPECIFICATIONS		APVD		SCALE	1=1.0			
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U2-17969		REV C
SEE SPECIFICATIONS								
		DO NOT SCALE THIS DRAWING			FILE: U2-17969		SHEET 1 OF	

C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.