



FEMALE END VIEW




 Ethernet

PANEL CUTOUT



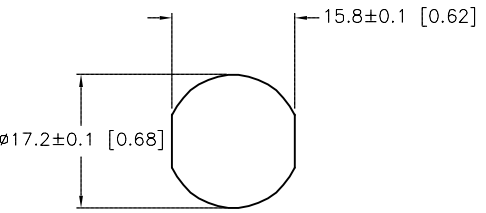


WIRING DIAGRAM



SPECIFICATIONS

CONTACT CARRIER MATERIAL	PA
CONTACT MATERIAL/FINISH	BRASS/GOLD
HOUSING MATERIAL	DIE CAST ZINC
O-RING MATERIAL	NBR
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
TEMPERATURE RANGE	-40°C to +85°C [-40°F to +185°F]
PROTECTION CLASS	MEETS IEC IP67

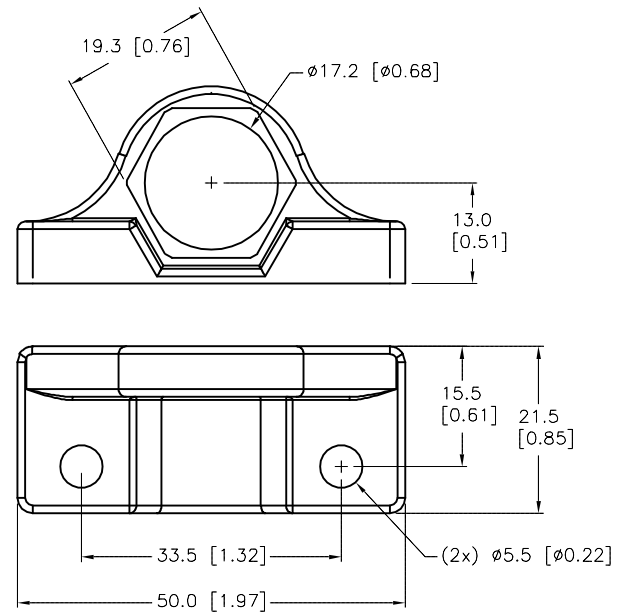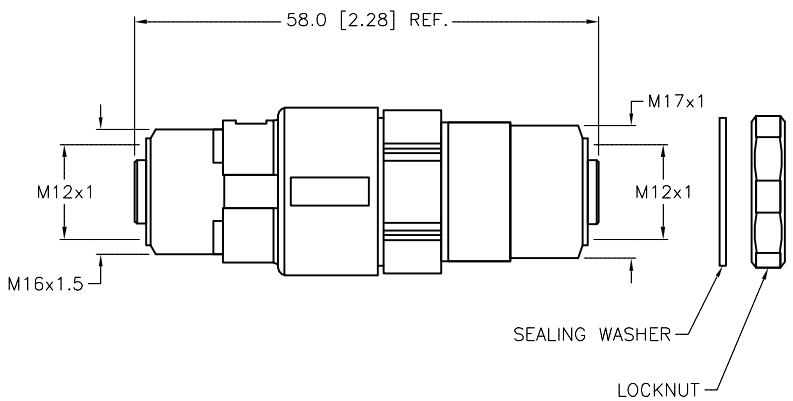


NOTES:
1. BRACKET AND RECEPTACLE ARE SEPARATE IN THE BAG.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT KMY

APVD A.A.

DATE 10/01/12

SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

TURCK

DESCRIPTION
FKD FKD 44/M12

IDENTIFICATION NO.
U2-20910

REV
C

MATERIAL
SEE SPECIFICATIONS

FINISH
SEE SPECIFICATIONS

CONTACT TURCK FOR MORE INFORMATION

C	UPDATE DRAWING PER ECO	NF	02/27/18	63179
REV	DESCRIPTION	BY	DATE	ECO NO.