


Accessories

Coaxial Tube

For LS-5 Series

LSCT-34-2000

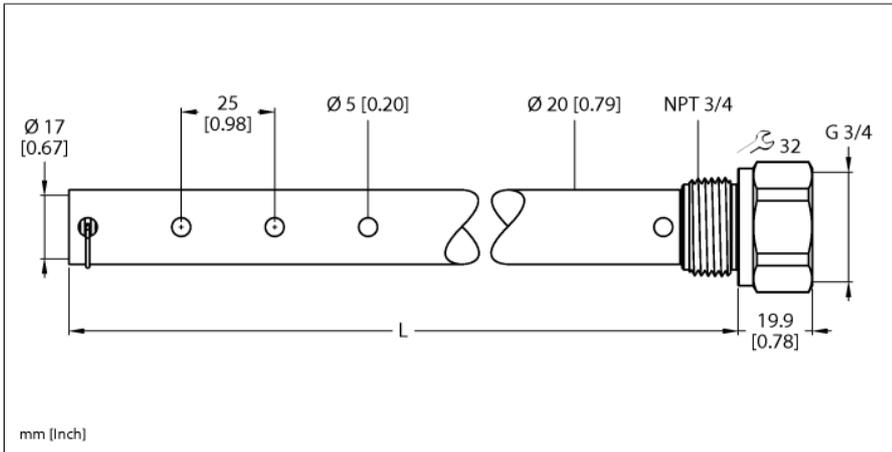

- Coaxial tube LS-5 level sensors
- Process connection NPT 3/4"
- Tube length 2000 mm

Type	LSCT-34-2000
ID	100015816
Remark to product	Attention: Coaxial tubes (accessories) are only available for LS-51 level sensors with process connection G3/4".
Application area	liquids
Probe length (L)	2000 mm
Mechanical data	
Material	Stainless steel, 1.4571
Process connection	3/4" NPT
Included in delivery	Centering set for LSCT-...

Functional principle

The level sensors of the LS-5 series work according to the principle of the guided microwave. The so-called Time Domain Reflectometry (TDR) is used. This method emits an electromagnetic wave along the probe. When the wave reaches the medium, it is partially reflected due to the dielectric constant compared to air. The electromagnetic wave is picked up again by the sensor and the distance to the liquid can now be determined via the transit time.

Accessories

Type code	Ident no.		Dimension drawing
LSAB2	100016515	PTFE centering star for mounting probes in the LS-5 product series in LSCT-xx-xxxx coaxial tubes	