


RI360P2-QR14-ELIU5X2-0.3-RS5

Inductive Angle Sensor – With Analog Output



Premium Line

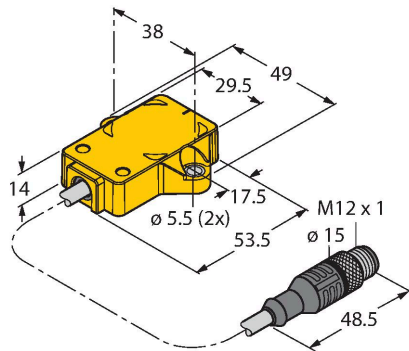

Features


- Rectangular, plastic
- Many mounting possibilities
- P2-Ri-QR14 included in delivery
- Measuring range displayed via LED
- Immune to electromagnetic interference
- Resolution, 12-bit
- 15...30 VDC
- Analog output
- Programmable measuring range
- 0...10 V and 4...20 mA
- Cable with male connector, M12 x 1

Wiring diagram

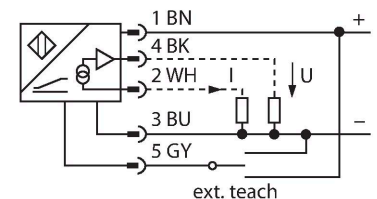

Functional principle

The measuring principle of inductive angle sensors is based on oscillation circuit coupling between the positioning element and the sensor, whereby an output signal is provided proportional to the angle of the positioning element. The rugged sensors are wear and maintenance-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. The innovative technology ensures a high immunity to electromagnetic DC and AC fields.

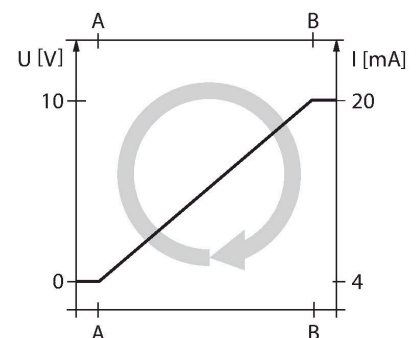

Technical data


Type	RI360P2-QR14-ELIU5X2-0.3-RS5
Ident. no.	1590859
Measuring principle	Inductive
Starting torque shaft load (radial / axial)	Not applicable because of contactless measuring principle
Resolution	0.09°
Measuring range	0...360°
Nominal distance	1.5 mm
Repeat accuracy	≤ 0.025 % of full scale
Linearity deviation	≤ 0.3 %f.s.
Temperature drift	≤ ± 0.01 % / K
Ambient temperature	-25...+70 °C
Operating voltage	15...30 VDC
Residual ripple	≤ 10 % U _{ss}
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes
Wire breakage/Reverse polarity protection	yes / yes (voltage supply)
Output function	5-pin, Analog output
Output type	absolute singleturn
Voltage output	0...10 V
Current output	4...20 mA
Load resistance voltage output	≥ 4.7 kΩ
Load resistance, current output	≤ 0.4 kΩ
Sample rate	800 Hz
Current consumption	< 50 mA

Technical data

Design	Rectangular, QR14
Dimensions	53.5 x 49 x 14 mm
Flange type	Flange without mounting element
Shaft Type	Blind hole shaft
Shaft diameter D (mm)	6 6.35
Housing material	Plastic, PBT-GF30-V0
Electrical connection	Cable with connector, M12 x 1
Cable quality	Ø 5.2 mm, Lif9YH-11YH, PUR, 0.3 m
	Flame retardant acc. to VDE 0472, part 804B
Core cross-section	5 x 0.34 mm ²
Vibration resistance	55 Hz (1 mm)
Vibration resistance (EN 60068-2-6)	20 g; 10...3000 Hz; 50 cycles; 3 axes
Shock resistance (EN 60068-2-27)	100 g; 11 ms ½ sinus; each 3x; 3 axes
Continuous shock resistance (EN 60068-2-29)	40 g; 6 ms ½ sinus; each 4000 x; 3 axes
Salt spray test (EN 60068-2-52)	severity degree 5 (4 test cycles)
Protection class	IP68 / IP69K
MTTF	138 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Measuring range display	multifunction LED, green green flashing
Included in delivery	positioning element P2-Ri-QR14; for technical details see data sheet

Mounting instructions

Mounting instructions/Description

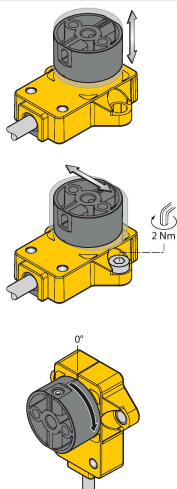

Adapter pins provide more flexibility

Extensive range of mounting accessories for easy adaptation to many different shaft diameters.

LED function

Operating voltage

Green: Power on

Measuring range

Green: Positioning element is in the measuring range

Green flashing: Positioning element is in the measuring range, signal low (e.g. distance too large)

LED OFF: Positioning element is outside the detection range

Functional safety through inductive measuring principle

Based on the functional principle of RLC coupling, the sensor operates absolutely wear-free and is immune to magnetized metal splinters and other interferences.

Owing to the differential analysis, the output signal remains almost unchanged, even if the position of the positioning element deviates from the ideal axis of rotation. The distance between the sensor and the positioning element can be

up to 5 mm, whereby the nominal distance is 1.5mm.

Variably adjustable (teaching with position sensor)

Bridge between teach input pin 5 (GY)	Gnd Pin 3 (BU)	Ub Pin 1 (BN)	LED
2 seconds	Initial value	End value	Power LED flashes then lights steadily after 2 s
10 seconds	CCW rotation, then return to last preset value	CW rotation, then return to last preset value	After 10 s power LED flashes quickly for 2 s
15 seconds	-	Factory setting (360°, CW)	Power and status LED alternate after 15 seconds


Preset – Mode (teach without position sensor)

Bridge between teach input pin 5 (GY)	Gnd Pin 3 (BU)	Ub Pin 1 (BN)	LED
2 seconds	Activate preset mode	Activate preset mode	Power LED steady, flashes after 2 s
10 seconds	CCW rotation, then return to last preset value	CW rotation, then return to last preset value	After 10 s power LED flashes quickly for 2 s
15 seconds	-	Factory settings (360°, CW)	Power and status LED alternate after 15 seconds
Angular range	Gnd Pin 3 (BU)	Ub Pin 1 (BN)	Power LED
30°	Press x 1	-	Blinking x 1
45°	Press x 2	-	Blinking x 2
60°	Press x 3	-	Blinking x 3
90°	-	Press x 1	Blinking x 1
180°	-	Press x 2	Blinking x 2
270°	-	Press x 3	Blinking x 3
360°	-	Press x 4	Blinking x 4

Accessories

P1-RI-QR14


1590812



Positioning element for angle sensors RI-QR14

P2-RI-QR14


1590819



Positioning element for angle sensors RI-QR14

P3-RI-QR14


1590865



Positioning element for angle sensors RI-QR14, flat design, using shield plate SP1-QR14 is recommended

SP1-QR14


1590873



Shield plate Ø 30 mm, aluminium

HSA-M6-QR14


6901051



Adapter for RI-QR14 specific positioning elements, hollow on solid shaft, Ø 6 mm

HSA-M8-QR14

6901052




Adapter for RI-QR14 specific positioning elements, hollow on solid shaft, Ø 8 mm

DS-RI-QR14

1590814

Spacer sleeves for rear mounting of RI-QR14, 2 pcs. per bag



Accessories

Dimension drawing	Type	Ident. no.	
60 30 20 8 4.5 12 42.5 15 M12 x 1	TX1-Q20L60	6967114	Teach adapter for inductive encoders, linear position, angle, ultrasonic and capacitive sensors