


YEL,PVC,5X26,S-DF,AWM General Purpose Cable – Reelfast™ Bulk Cable



Features

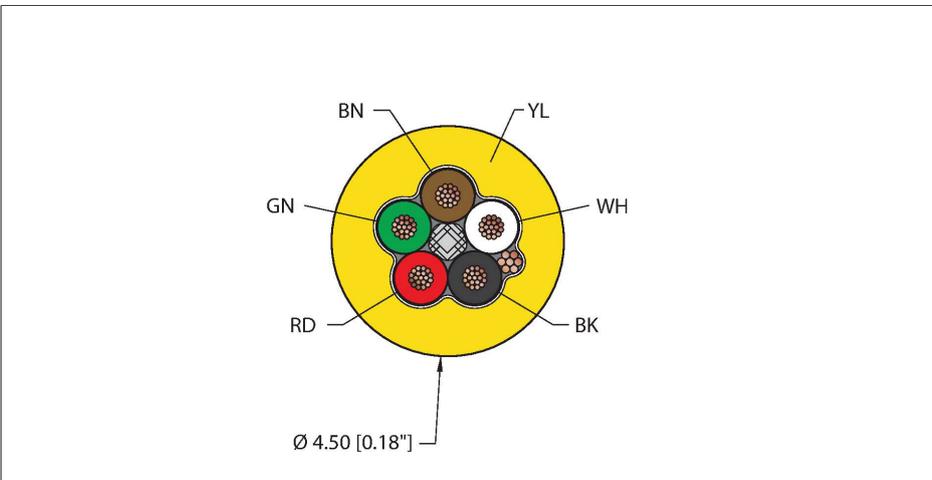

- UL/CSA AWM 300V
- General Purpose Cable
- Yellow PVC jacket, shielded, 5X26 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL1061, CSA FT1

Technical data

Type	YEL,PVC,5X26,S-DF,AWM
Ident. no.	RF50886
Cable	
Cable platform	Universal cable
	5
Cable diameter	Ø 4.5 mm
Cable jacket	PVC, Yellow
Shielding	Aluminum/polyester (IN)
Cable gland size	26 AWG, TC (Tinned Copper)
Conductor diameter	0.039 "
Conductor material	?
Core insulation	PVC
Core cross-section	5 x 26 AWG [Similar to 0.14 mm ²]
Arrangement of strands	19 x 38 AWG
Core colors	WH, BK, RD, GN, BN
Weight	0.062 lbs. /meter
Electrical properties at +20 °C	
Voltage	UL/CSA AWM 300V
Dielectric withstand (min.)	2 KVAC
DC resistance (max)	40.8 Ω/1000ft max
Mechanical and chemical properties	
Bending radius (stationary installation)	≥ 5 x Ø
Bending radius (flexible use)	≥ 15 x Ø
Cold flexural strength	-40 °C
Stationary	-40 °C...+105 °C
In motion	-40 °C...+105 °C
	-20 °C...+105 °C

Technical data

Approval

UL Approvals	UL 758 AWM 2517
--------------	-----------------

CSA Approvals	CSA AWM I/II A/B CSA FT1
---------------	-----------------------------

Cable compliances	RoHS CE
-------------------	------------

Note

- Flex values can be reduced when used in extreme temperatures, in contact with certain chemicals, above the nominal speed or below the nominal bending radius.

- We reserve the right to make technical modifications without prior notice.