


TEA,TPE,4UTPX26,S-BF,CM,FL,EN,CAT6A,SND
Industrial Ethernet Cable – Reelfast™ Bulk Cable

Features



- Unshielded Twisted Pair
- UL/CSA CMX OUTDOOR 300V
- CM 300V
- Industrial Ethernet Cable
- fieldbus type: Ethernet CAT6A, Teal TPE jacket, shielded, 4UTPX26 AWG
- -40 Cold Bend Rating
- Flame Ratings: UL 1666, UL1061
- Flexlife®
- Flexlife®

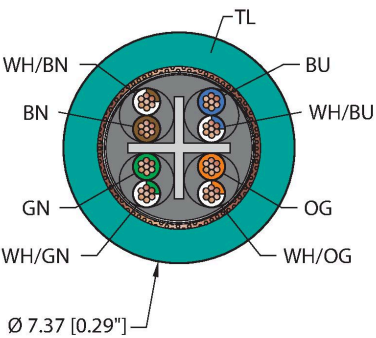

Technical data

Type	TEA,TPE,4UTPX26,S-BF,CM,FL,EN,CAT6A,SND
Ident. no.	RF52026
Cable	
Cable platform	Industrial Ethernet cable
Cable	Ethernet CAT6A, 860
	8
Cable diameter	Ø 6.99 mm
Cable jacket	TPE, Teal
Shielding	Aluminum/polyester (OUT)
Braid material	38 AWG, TC (tinned copper), 75% covered
Conductor material	?
Core colors	BU, WH/BU, OG, WH/OG, GN, WH/GN, BN, WH/BN
Description of assembly	UTP (unshielded twisted pair)
Number of assemblies	4
Conductor diameter	0.034 "
Core insulation	HDPE
Core cross-section	2x26 AWG [Similar to 0.14 mm²]
braid arrangement	7x34 AWG
Weight	0.133 lbs. /meter
Electrical properties at +20 °C	
Voltage	UL/CSA CMX OUTDOOR 300V CM 300V
	1kHz 5.6 nF/100m
Voltage rating	300
	44.4 Ω/1000ft
DC resistance unbalanced	4 %

Technical data

Coupling attenuation	$30 \leq f \leq 100 \text{ MHz}$ 85-20 LOG (f/100) dB min., 85 dB min.
Surface transfer impedance	$1 \leq f \leq 100 \text{ MHz}$ 1000 mΩ/m
Cable testing note	100
	1kHz 330 pF/100m
Return loss1	$1 \leq f < 10 \text{ MHz}$ 20 + 5 LOG(f) dB min.
Return loss2	$10 \leq f < 20 \text{ MHz}$ 25 dB min.
Return loss3	$20 \leq f \leq 100 \text{ MHz}$ 25 - 7 LOG(f/20) dB min.
Insurtion loss	$1 \leq f \leq 500 \text{ MHz}$ 1.5[1.82 $\sqrt{f}$ + 0.0091 (f) + 0.25/ $\sqrt{f}$] dB MAX
Near End Cross Talk	$1 \leq f \leq 500 \text{ MHz}$ 44.3 - 15 LOG(f/100) dB MIN
Power Sum Near-End Crosstalk	$1 \leq f \leq 500 \text{ MHz}$ 42.3 - 15 LOG(f/100) dB min.
Attenuation to Crosstalk Ratio Far	$1 \leq f \leq 500 \text{ MHz}$ 27.8 - 20 LOG(f/100) dB min.
Power Sum Attenuation to Crosstalk Ratio, Far-End	$1 \leq f \leq 500 \text{ MHz}$ 24.8 - 20 LOG(f/100) dB min.
Propagation delay	$1 \leq f \leq 100 \text{ MHz}$ 534 + 36/ $\sqrt{f}$ ns max
Propagation delay skew	$1 \leq f \leq 500 \text{ MHz}$ <45ns
Mechanical and chemical properties	
Bending radius (stationary installation)	$\geq 4 \times \varnothing$
Bending radius (flexible use)	$\geq 10 \times \varnothing$
Torsion cycles	3 million
Cold flexural strength	-40 °C
Bending cycles 10 x $\varnothing$	1 million *
Bending cycles 20 x $\varnothing$	10 million *
Stationary	-40 °C...+80 °C
In motion	-40 °C...+80 °C
	-20 °C...+80 °C
Approval	
UL Approvals	UL 444 CMX OUTDOOR-CM
CSA Approvals	UL 444 CMX OUTDOOR-CM
Cable compliances	RoHS CE
Note	
	- Flex values can be reduced when used in extreme temperatures, in contact with cer- tain chemicals, above the nominal speed or below the nominal bending radius.
	- We reserve the right to make technical modifications without prior notice.