




Actuator and Sensor Cable, PVC  
TPE cable jacket  
RKM 56-2M/S3059

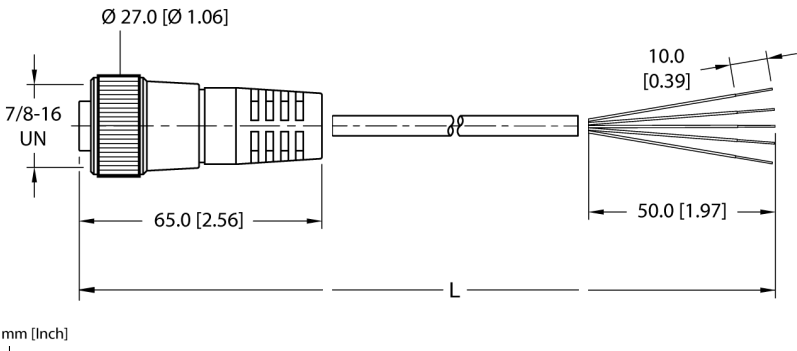

|                        |                              |
|------------------------|------------------------------|
| Type                   | RKM 56-2M/S3059              |
| ID                     | U-35762                      |
| Connector A            | Female, 7/8"-16 UN, Straight |
| Number of pins         | 5                            |
| Contacts               | Brass, CuZn, Gold-plated     |
| Contact carriers       | Plastic, TPU, Yellow         |
| Connector body         | Plastic, TPU, Yellow         |
| Coupling nut/screw     | Brass, CuZn, Nickel-plated   |
| Protection class       | IP67, IP68, IP69, IP69K      |
| Mechanical lifespan    | > 100 Mating cycles          |
| Pollution degree       | 3                            |
| Cable diameter         | Ø 10.01 mm                   |
| Cable length           | 2 m                          |
| Cable jacket           | TPE, Yellow                  |
| Core insulation        | PVC/nylon                    |
| Core colors            | WH, RD, GN/YE, OG, BK        |
| Core cross-section     | 5                            |
| Arrangement of strands | 65                           |
| Voltage                | 600 V                        |
| Current                | 10 A                         |

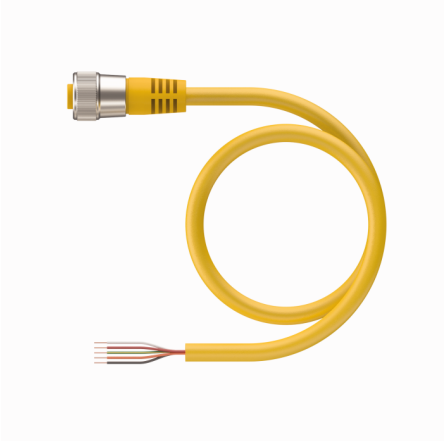

- 7/8" female connector, straight, 5-pin
- Power Tray/Exposed Run/Direct Burial Cable
- TPE jacket, yellow, 5 × 16 AWG
- UV resistant
- -40 °C cold bending strength
- Oil resistant
- Fire classes: UL 1685 FT4, UL 1061, CSA FT1, CSA FT4



Circuit Diagram

|   |       |
|---|-------|
| 1 | WH    |
| 2 | RD    |
| 3 | GN/YE |
| 4 | OG    |
| 5 | BK    |