



FKD FKD 44/M12
Wall feedthrough – Flanschkupplung auf Flanschkupplung

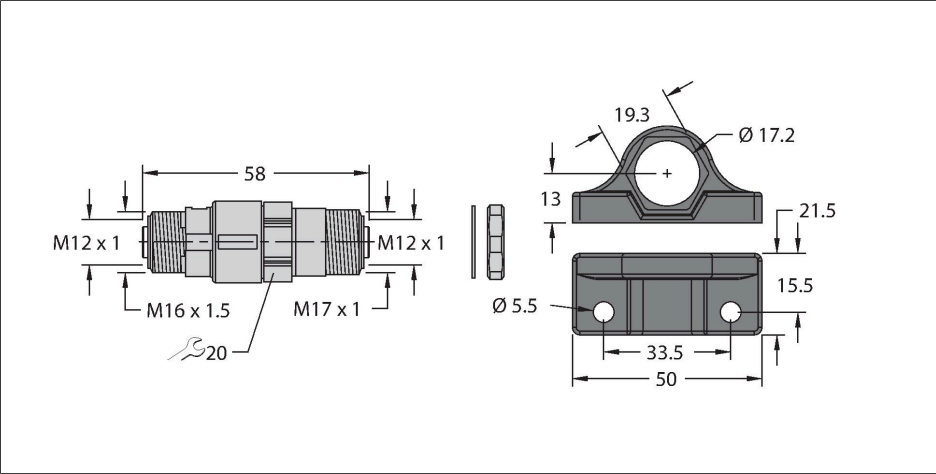

Features

- Für Industrial Ethernet
- M12x1-Kupplung auf M12x1-Kupplung, 4-polig
- Einbaugewinde: M16x1.5
- D-Codierung
- Spannung: 50 V
- Strombelastbarkeit: 4 A
- Temperatur: -25...+85°C
- Schutzart: IP67

Diagram



Technical data

Type	FKD FKD 44/M12
Ident. no.	U2-20910
Connector A	2x Female Connector, M12 × 1, Straight
Number of pins	4
Contacts	Metal, CuZn, Gold-plated
Contact carriers	Plastic, PA, Gray
Connector body	Metal, CuZn
Flange housing	Brass, CuZn, nickel-plated
Screw-in thread	M16x1.5
Protection class	IP67, (screwed together)
Screw-in Thread	M12x1
Cable	Ethernet
Electrical properties at +20 °C	
Rated voltage	48 V
Current	4 A
Stationary	-25 °C...+85 °C
Note	- We reserve the right to make technical modifications without prior notice.