


RSF RKF 50/22

Accessories for actuator/sensor cables – Wall Feedthrough

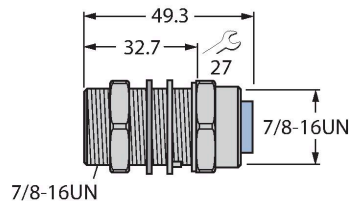

Features

- 7/8" wall feedthrough, 5-pin
- Male to female
- Voltage: 600 V
- Ampacity: 9 A
- Temperature: -40 °C...+105 °C
- IEC IP67; NEMA 1, 3, 4

Contact assignment



Technical data

Type	RSF RKF 50/22
ID no.	U2309-5
Connector A	Male, 7/8"-16 UN, Straight
Number of Pins	5
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector body	Brass, CuZn, Nickel-plated
Coupling nut/screw	Brass
Screw-in thread	7/8"-16 UN
Mechanical lifespan	> 100 Mating cycles
Pollution degree	3
Type of protection	IP67, (screwed together)
Connector B	Female, Straight
Cable	
Electrical properties at +20 °C	
Rated voltage	600 V
Current	9 A
Ambient temperature range (stationary)	-40 °C...+105 °C
Note	

Circuit Diagram

