


Analog Signal Isolator

2-channel

IM12-AO01-2I-2I-H0/24VDC/CC

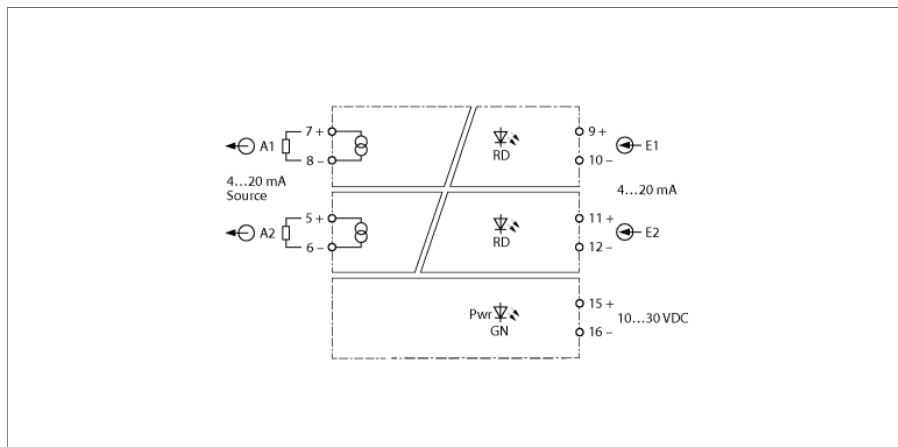


The 2-channel IM12-AO01-2I-2I-H0/24VDC/CC signal isolator is designed to transmit the normalized current signal galvanically isolated 1:1. In addition to the analog signal, digital HART® communication signals can also be transmitted bidirectionally. Typical applications are for example the control of I/P converters or indicators.

The green LED indicates operational readiness. The device can detect a wire break or short circuit on the field side, the input of the related channel then switches to a high impedance state. An error in the input circuit causes the red LED to flash according to NE44.

The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508) and meets the requirements of NE21. It is equipped with removable spring type terminals.


The device is equipped with removable spring-type terminals.

- Output circuits monitored for wire break and short circuit
- Complete galvanic isolation
- HART transparent
- Removable spring type terminals
- ATEX use in Zone 2, cUL
- SIL 2

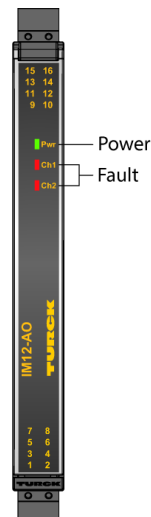

Dimensions

Type	IM12-AO01-2I-2I-H0/24VDC/CC
ID	7580427
Operating voltage U_s	10...30 VDC
Power dissipation, typical	$\leq 1.31 \text{ W}$
Input current	$2 \times 4...20 \text{ mA}$
Reference temperature	23°C
Output circuits	
Output current	$2 \times 4...20 \text{ mA}$
Load resistance current output	$\leq 0.8 \text{ k}\Omega$
Minimum load	$\geq 50 \Omega$
Short-circuit	At a load resistance of $< 30 \Omega$, the input current is $< 500 \mu\text{A}$
Wire break	at a load resistance of $> 30 \text{ k}\Omega$ the input current is $< 500 \mu\text{A}$
Response characteristic	
Rise time (10...90 %)	$\leq 10 \text{ ms}$
Fall time (90...10 %)	$\leq 10 \text{ ms}$
Measuring accuracy (including linearity, hysteresis and repeatability)	$\leq 0.05 \%$ of full scale
Temperature drift	$\leq 0.002 \%$ of full scale/K
Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508



Mechanical data		
Protection class	IP20	
Flammability class acc. to UL 94	V-0	
Dimensions	120 x 12.5 x 128 mm	
Weight	167 g	
Mounting instructions	DIN rail (NS35)	
Housing material	Plastic, Polycarbonate/ABS	
Electrical connection	Removable spring-type terminals, 2-pin	
Terminal cross-section	0.2...2.5 mm² (AWG: 24...14)	
Environmental conditions	Operating height	Up to 2000 m above sea level
	Pollution degree	II
	Surge/Overvoltage category	II (EN 61010-1)
	Standards used	
	Voltage resistance and insulation	
		EN 50178
		EN 61010-1
		EN 50155
		GL VI-7-2
	Shock	
		EN 61373 class B
		EN 50155
		GL VI-7-2
		EN 60068-2-6
		EN 60068-2-27
	Temperature	
		EN 60068-2-1 Ad
		EN 50155
		GL VI-7-2
		EN 60068-2-2 Bd
		EN 60068-2-1
	Air humidity	
		EN 60068-2-38
	EMC	
		EN 50155
		GL VI-7-2
		NE21
		EN 61326-1
		EN 61326-3-1
		EN 61000-4-2
		EN 61000-4-3
		EN 61000-4-4
		EN 61000-4-5
		EN 61000-4-6
		EN 61000-4-11
		EN 61000-4-29
		EN 55011
		EN 55016
		EN 50121-3-2
		EN 61000-6-2

Accessories

Type code	Ident no.		Dimension drawing
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	