


WS 4.2T-x Actuator and Sensor Cable – Connection Cable




Features

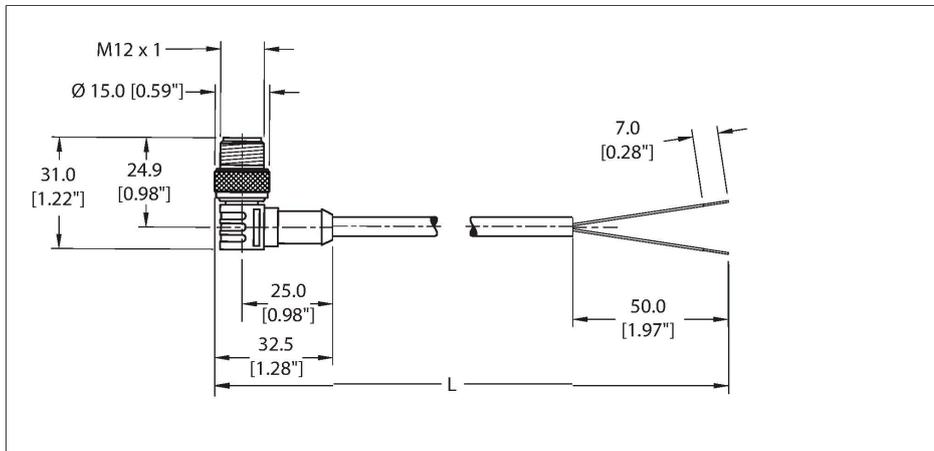


- M12 male connector, right angle, 3-pin
- Instrumentation Tray Cable
- Gray PVC jacket, 2X20 AWG
- Sunlight Resistant
- -40 Cold Bend Rating
- Oil Resistant
- Flame Ratings: UL 1685 FT4, UL1061, CSA FT4
- Flexlife® and C-Track Approved

Cable Cross-Section

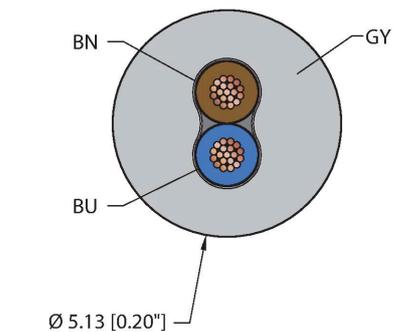


Contact assignment

Connector A



Diagram



Technical data

Type	WS 4.2T-x
Ident. no.	777000716
Connector A	Connectors, M12 × 1, Right Angle, A-code
Design specification	acc. to IEC 61076-2-101
Number of pins	4
Contacts	Bronze, CuSn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector body	Plastic, TPU, Yellow
Coupling nut/screw	Brass, CuZn, Nickel-plated
Mechanical lifespan	> 100 Mating cycles
Pollution degree	3
Protection class	IP68, IP69K
	NEMA: 1, 3, 4, 6P
Tightening torque (range)	0.8 ... 1 Nm (observe max. torque of mating connector!)
Cable	
Cable ID	RF50529
	2
Cable diameter	Ø 5.13 mm
Cable jacket	PVC, Gray
Conductor diameter	0.061 "
Conductor material	?
Core insulation	PVC
Core cross-section	2 x 20 AWG [Similar to 0.50 mm ²]
Arrangement of strands	19 x 0.0073 "
Core colors	BN, BU
Electrical properties at +20 °C	
Rated voltage	250 V

Technical data

Current	4 A
Mechanical and chemical properties	
Bending radius (stationary installation)	$\geq 5 \times \varnothing$
Bending radius (flexible use)	$\geq 10 \times \varnothing$
Cold flexural strength	-40 °C
Bending cycles 20 x \varnothing	10 million *
C-track	Yes
Stationary	-40 °C...+105 °C
In motion	5 °C...+105 °C
	-20 °C...+105 °C
Approval	
Approvals	UL 2238 CSA C22.2 No. 182.3 CE RoHS
Note	
	- Flex values can be reduced when used in extreme temperatures, in contact with certain chemicals, above the nominal speed or below the nominal bending radius.
	- We reserve the right to make technical modifications without prior notice.